




SELECTABLE GALLONAGE FIRE NOZZLE 60L

QLD6.0/1.0 III


QUANZHOU FOREDE FIREFIGHTING EQUIPMENT CO.,LTD.

■ NOZZLE DESCRIPTION

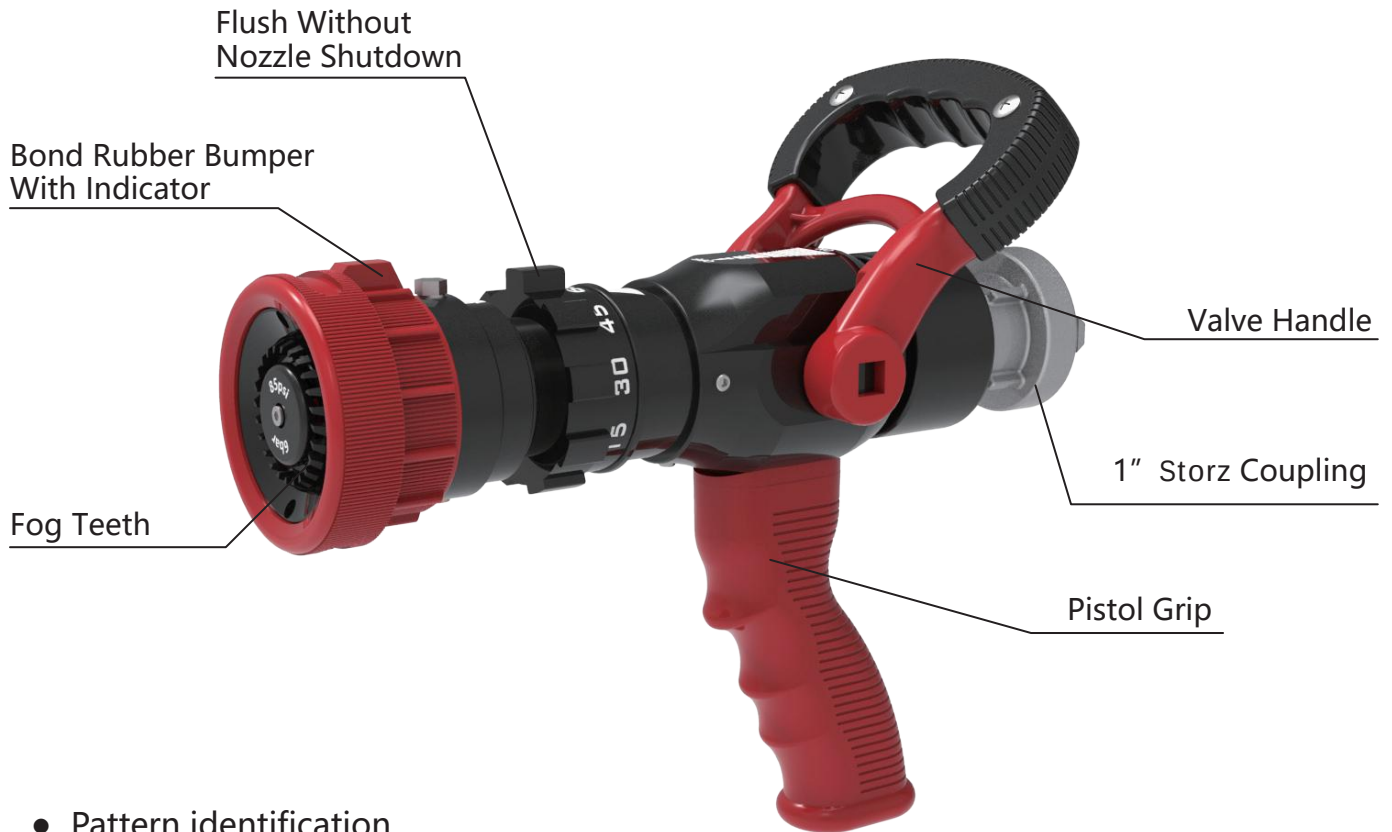

- Pattern identification
- Hard anodized aluminum , Laser engraved
- Simple to operate (1/4 turn from straight stream to fog)
- Raised lug marks straight stream for limited visibility operations
- Easy to service & repair
- Compatible with quick attach foam tube

■ OUTLINE DIMENSIONS

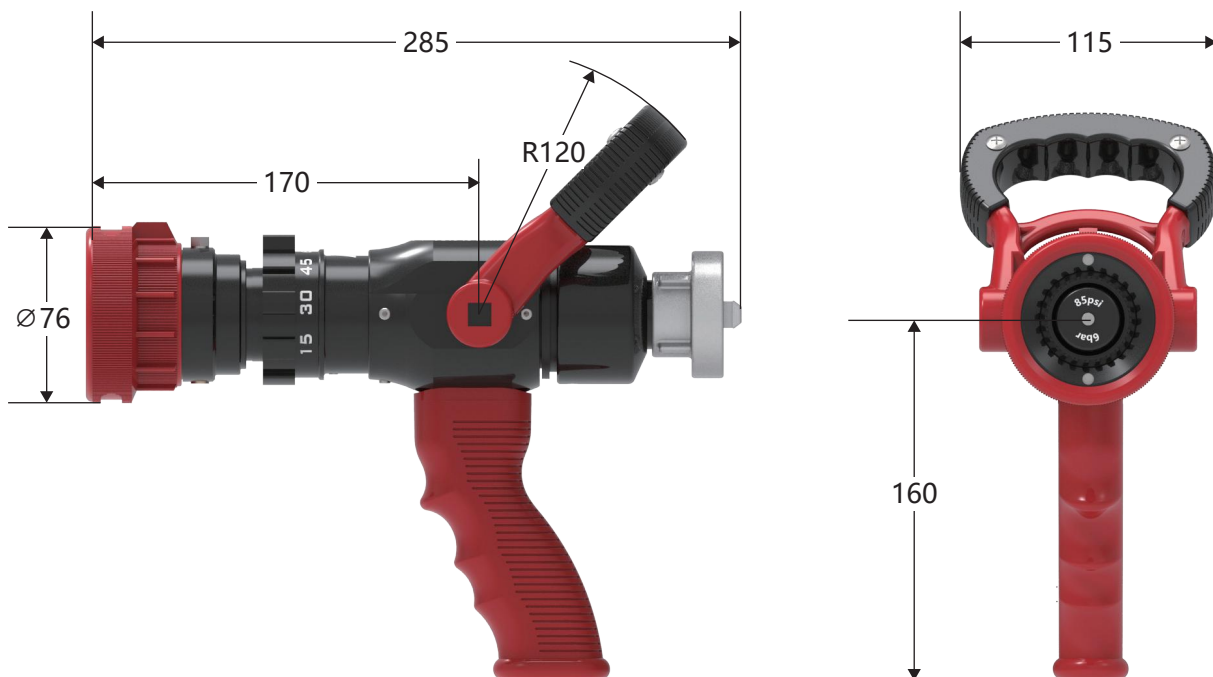


QLD 6.0/1.0 III Fire Nozzle Outline Dimensions (MM)


■ TECHNICAL SPECIFICATION

Weight	1.85 kg	Throw Range	35m @ 6bar
Material	Body: Aluminum Valve: Aluminum Handle: ABS Bumper: Rubber	Flow Range	15 L/M@6bar 30 L/M@6bar 45 L/M@6bar 60 L/M@6bar Flush
Work Pressure	85PSI (6 bar)	Inlet Size	1" (25mm)
Max. Pressure	360PSI (25 bar)	Coupling	Storz / NH / BSP /Russian type etc.
Max. Fog Angle	110°		


■ OPERATING INSTRUCTIONS

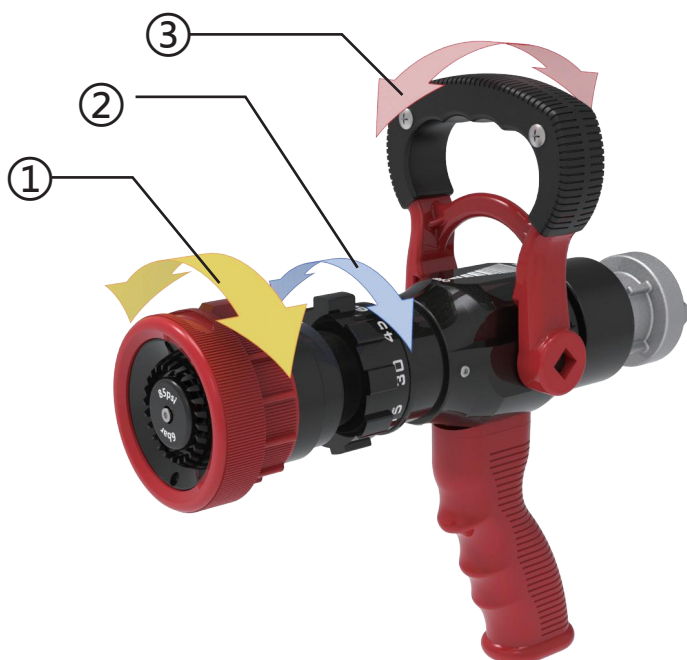

- ①——SS-FOG Pattern: Twist the rubber bumper
- ②——Flow Rate Adjust: Twist the flow adjust ring to obtain required flow rate
- ③——Valve Handle: Push the handle forward-valve close; Pull the handle backward-valve open

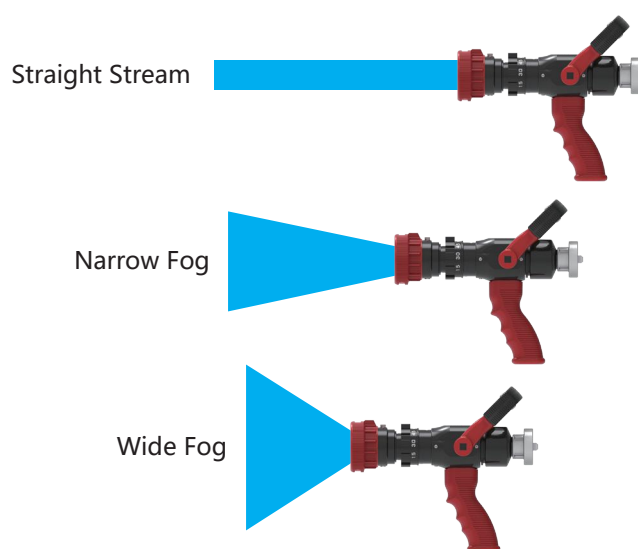

■ PERFORMANCE CHART

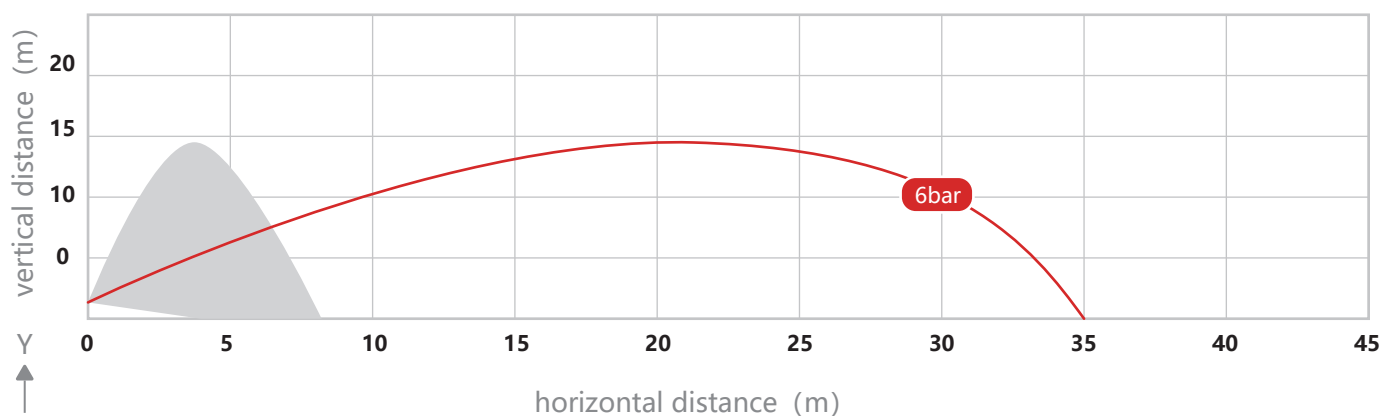

Max. Throw Range 35m (6bar)

Max. Fog Angle 110°